

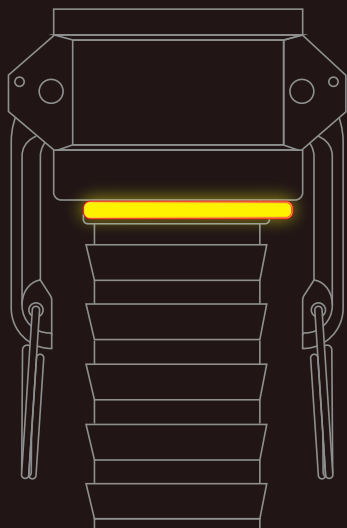


FEATURES - CRIMP LOCKING COLLAR
& BRASS LEVERS

NEW STAINLESS STEEL INTERLOCK
CRIMP FERRULE RANGE




CAMLOCK FITTINGS



 **ALFAGOMMA**

CAMLOCK CAM and GROOVE


I519C200 / I579C200



Type C - Female to Hose End - Aluminium (A - A 59326D) Supersedes MIL C - 27.487
Hose End with Locking Collar for Smooth Crimp Ferrules, Crimping Rings or Clamps

Item Code	Part Number	Hose ID mm	Coupling size mm	W.P bar	W.P psi	Crimp Locking Collar
2301859	I519C200-019019	19	19	17	250	
2300640	I519C200-025025	25	25	17	250	
2300641	I519C200-032032	32	32	17	250	
	I579C200-038038	38	38	17	250	•
	I579C200-051051	51	51	17	250	•
	I579C200-063063	63	63	10	150	•
	I579C200-076076	76	76	8	125	•
	I579C200-102102	102	102	7	100	•
2302679	I519C200-127127	127	127	5	75	
	I579C200-152152	152	152	5	75	•


I319C200 / I379C200



Type C - Female to Hose End - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487
Hose End with Locking Collar for Smooth Crimp Ferrules, Crimping Rings or Clamps

Item Code	Part Number	Hose ID mm	Coupling size mm	W.P bar	W.P psi	Crimp Locking Collar
2301866	I319C200-019019	19	19	17	250	
2300620	I319C200-025025	25	25	17	250	
2300621	I319C200-032032	32	32	17	250	
	I379C200-038038	38	38	17	250	•
	I379C200-051051	51	51	17	250	•
2301868	I319C200-063063	63	63	10	150	
	I379C200-076076	76	76	8	125	•
	I379C200-102102	102	102	7	100	•
2302449	I319C200-152152	152	152	5	75	

I819C200 / I879C200



Type C - Female to Hose End - Brass (A - A 59326D) Supersedes MIL C - 27.487
Hose End with Locking Collar for Smooth Crimp Ferrules, Crimping Rings or Clamps

Item Code	Part Number	Hose ID mm	Coupling size mm	W.P bar	W.P psi	Crimp Locking Collar
2301871	I819C200-019019	19	19	17	250	
2302759	I819C200-025025	25	25	17	250	
2302760	I819C200-032032	32	32	17	250	
2301872	I819C200-038038	38	38	17	250	
	I879C200-051051	51	51	17	250	•
2301873	I819C200-063063	63	63	10	150	
	I879C200-076076	76	76	8	125	•
	I879C200-102102	102	102	7	100	•

I519C100 / I579C100




Type E - Male to Hose End - Aluminium (A - A 59326D) Supersedes MIL C - 27.487
Hose End with Locking Collar for Smooth Crimp Ferrules, Crimping Rings or Clamps

Item Code	Part Number	Hose ID mm	Coupling size mm	W.P bar	W.P psi	Crimp Locking Collar
2302675	I519C100-019019	19	19	17	250	
2300633	I519C100-025025	25	25	17	250	
2301736	I519C100-032032	32	32	17	250	
	I579C100-038038	38	38	17	250	•
	I579C100-051051	51	51	17	250	•
	I579C100-063063	63	63	10	150	•
	I579C100-076076	76	76	8	125	•
	I579C100-102102	102	102	7	100	•
2302678	I519C100-127127	127	127	5	75	
	I579C100-152152	152	152	5	75	•

CAMLOCK CAM and GROOVE


I319C100 / I379C100



Type E - Male to Hose End - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487
Hose End with Locking Collar for Smooth Crimp Ferrules, Crimping Rings or Clamps

Item Code	Part Number	Hose ID mm	Coupling size mm	W.P bar	W.P psi	Crimp Locking Collar
2301927	I319C100-019019	19	19	17	250	
2300168	I319C100-025025	25	25	17	250	
2301929	I319C100-032032	32	32	17	250	
	I379C100-038038	38	38	17	250	•
	I379C100-051051	51	51	17	250	•
2302445	I319C100-063063	63	63	10	150	
	I379C100-076076	76	76	8	125	•
	I379C100-102102	102	102	7	100	•
2302447	I319C100-152152	152	152	5	75	


I819C100 / I879C100



Type E - Male to Hose End - Brass (A - A 59326D) Supersedes MIL C - 27.487
Hose End with Locking Collar for Smooth Crimp Ferrules, Crimping Rings or Clamps

Item Code	Part Number	Hose ID mm	Coupling size mm	W.P bar	W.P psi	Crimp Locking Collar
2302756	I819C100-019019	19	19	17	250	
2302757	I819C100-025025	25	25	17	250	
2301943	I819C100-032032	32	32	17	250	
2301944	I819C100-038038	38	38	17	250	
	I879C100-051051	51	51	17	250	•
2301945	I819C100-063063	63	63	10	150	
	I879C100-076076	76	76	8	125	•
	I879C100-102102	102	102	7	100	•


I5A9C606



Type A - Male to Female BSP - Aluminium (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301830	I5A9C606-019027	BSP	19	17	250
2300182	I5A9C606-025034	BSP	25	17	250
2300183	I5A9C606-032042	BSP	32	17	250
2301831	I5A9C606-038049	BSP	38	17	250
2301832	I5A9C606-051060	BSP	51	17	250
2301833	I5A9C606-063076	BSP	63	10	150
2301834	I5A9C606-076090	BSP	76	8	125
2301835	I5A9C606-102114	BSP	102	7	100
2302706	I5A9C606-127140	BSP	127	5	75
2301836	I5A9C606-152165	BSP	152	5	75

I3A9C606




Type A - Male to Female BSP - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301837	I3A9C606-019027	BSP	19	17	250
2300148	I3A9C606-025034	BSP	25	17	250
2300149	I3A9C606-032042	BSP	32	17	250
2301838	I3A9C606-038049	BSP	38	17	250
2301839	I3A9C606-051060	BSP	51	17	250
2301840	I3A9C606-063076	BSP	63	10	150
2302602	I3A9C606-076090	BSP	76	8	125
2302603	I3A9C606-102114	BSP	102	7	100
2302604	I3A9C606-152165	BSP	152	5	75

CAMLOCK CAM and GROOVE


I8A9C606



Type A - Male to Female BSP - Brass (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301841	I8A9C606-019027	BSP	19	17	250
2301842	I8A9C606-025034	BSP	25	17	250
2302789	I8A9C606-032042	BSP	32	17	250
2302790	I8A9C606-038049	BSP	38	17	250
2301843	I8A9C606-051060	BSP	51	17	250
2301844	I8A9C606-063076	BSP	63	10	150
2301845	I8A9C606-076090	BSP	76	8	125
2301846	I8A9C606-102114	BSP	102	7	100


I5A9C007



Type B - Female to Male BSPT - Aluminium (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301847	I5A9C007-019027	BSPT	19	17	250
2301848	I5A9C007-025034	BSPT	25	17	250
2301849	I5A9C007-032042	BSPT	32	17	250
2301850	I5A9C007-038049	BSPT	38	17	250
2301851	I5A9C007-051060	BSPT	51	17	250
2301852	I5A9C007-063076	BSPT	63	10	150
2301853	I5A9C007-076090	BSPT	76	8	125
2302699	I5A9C007-102114	BSPT	102	7	100
2302700	I5A9C007-127140	BSPT	127	5	75
2302701	I5A9C007-152165	BSPT	152	5	75


I3A9C007



Type B - Female to Male BSPT - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301765	I3A9C007-019027	BSPT	19	17	250
2301854	I3A9C007-025034	BSPT	25	17	250
2302593	I3A9C007-032042	BSPT	32	17	250
2301855	I3A9C007-038049	BSPT	38	17	250
2301856	I3A9C007-051060	BSPT	51	17	250
2302594	I3A9C007-063076	BSPT	63	10	150
2302595	I3A9C007-076090	BSPT	76	8	125
2302596	I3A9C007-102114	BSPT	102	7	100
2302701	I3A9C007-152165	BSPT	152	5	75


I8A9C007



Type B - Female to Male BSPT - Brass (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2302779	I8A9C007-019027	BSPT	19	17	250
2302780	I8A9C007-025034	BSPT	25	17	250
2301857	I8A9C007-032042	BSPT	32	17	250
2301858	I8A9C007-038049	BSPT	38	17	250
2302781	I8A9C007-051060	BSPT	51	17	250
2302782	I8A9C007-063076	BSPT	63	10	150
2302783	I8A9C007-076090	BSPT	76	8	125
2302784	I8A9C007-102114	BSPT	102	7	100

I5A9C806




Type D - Female to Female BSP - Aluminium (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301876	I5A9C806-019027	BSP	19	17	250
2300193	I5A9C806-025034	BSP	25	17	250
2300194	I5A9C806-032042	BSP	32	17	250
2301877	I5A9C806-038049	BSP	38	17	250
2301878	I5A9C806-051060	BSP	51	17	250
2301879	I5A9C806-063076	BSP	63	10	150
2301880	I5A9C806-076090	BSP	76	8	125
2301881	I5A9C806-102114	BSP	102	7	100
2302711	I5A9C806-127140	BSP	127	5	75
2301882	I5A9C806-152165	BSP	152	5	75

CAMLOCK CAM and GROOVE


I3A9C806



Type D - Female to Female BSP - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301883	I3A9C806-019027	BSP	19	17	250
2300155	I3A9C806-025034	BSP	25	17	250
2300156	I3A9C806-032042	BSP	32	17	250
2301884	I3A9C806-038049	BSP	38	17	250
2301885	I3A9C806-051060	BSP	51	17	250
2301886	I3A9C806-063076	BSP	63	10	150
2301887	I3A9C806-076090	BSP	76	8	125
2302224	I3A9C806-102114	BSP	102	7	100
2302611	I3A9C806-152165	BSP	152	5	75


I8A9C806



Type D - Female to Female BSP - Brass (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301888	I8A9C806-019027	BSP	19	17	250
2301889	I8A9C806-025034	BSP	25	17	250
2301890	I8A9C806-032042	BSP	32	17	250
2301891	I8A9C806-038049	BSP	38	17	250
2301892	I8A9C806-051060	BSP	51	17	250
2301893	I8A9C806-063076	BSP	63	10	150
2301894	I8A9C806-076090	BSP	76	8	125
2301895	I8A9C806-102114	BSP	102	7	100


I5A9C507



Type F - Male to Male BSPT - Aluminium (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301948	I5A9C507-019027	BSPT	19	17	250
2301949	I5A9C507-025034	BSPT	25	17	250
2301950	I5A9C507-032042	BSPT	32	17	250
2301951	I5A9C507-038049	BSPT	38	17	250
2301952	I5A9C507-051060	BSPT	51	17	250
2301953	I5A9C507-063076	BSPT	63	10	150
2301954	I5A9C507-076090	BSPT	76	8	125
2301955	I5A9C507-102114	BSPT	102	7	100
2302703	I5A9C507-127140	BSPT	127	5	75
2302704	I5A9C507-152165	BSPT	152	5	75


I3A9C507



Type F - Male to Male BSPT - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2301956	I3A9C507-019027	BSPT	19	17	250
2301957	I3A9C507-025034	BSPT	25	17	250
2301958	I3A9C507-032042	BSPT	32	17	250
2302598	I3A9C507-038049	BSPT	38	17	250
2301960	I3A9C507-051060	BSPT	51	17	250
2301961	I3A9C507-063076	BSPT	63	10	150
2302599	I3A9C507-076090	BSPT	76	8	125
2302600	I3A9C507-102114	BSPT	102	7	100
2301882	I3A9C507-152165	BSPT	152	5	75

I8A9C507




Type F - Male to Male BSPT - Brass (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Thread Type	Coupling size mm	W.P bar	W.P psi
2302785	I8A9C507-019027	BSPT	19	17	250
2302786	I8A9C507-025034	BSPT	25	17	250
2302787	I8A9C507-032042	BSPT	32	17	250
2301962	I8A9C507-038049	BSPT	38	17	250
2301963	I8A9C507-051060	BSPT	51	17	250
2301964	I8A9C507-063076	BSPT	63	10	150
2301965	I8A9C507-076090	BSPT	76	8	125
2302788	I8A9C507-102114	BSPT	102	7	100

CAMLOCK CAM and GROOVE


I5A9C900



Type DC - Female Dust Cap - Aluminium (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Hose ID mm	W.P bar	W.P psi
2301967	I5A9C900-019	19	17	250
2300200	I5A9C900-025	25	17	250
2300201	I5A9C900-032	32	17	250
2301968	I5A9C900-038	38	17	250
2301969	I5A9C900-051	51	17	250
2301970	I5A9C900-063	63	10	150
2301971	I5A9C900-076	76	8	125
2301972	I5A9C900-102	102	7	100
2302712	I5A9C900-127	127	5	75
2302713	I5A9C900-152	152	5	75


I3A9C900



Type DC - Female Dust Cap - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Hose ID mm	W.P bar	W.P psi
2301973	I3A9C900-019	19	17	250
2301546	I3A9C900-025	25	17	250
2302612	I3A9C900-032	32	17	250
2302613	I3A9C900-038	38	17	250
2302225	I3A9C900-051	51	17	250
2302614	I3A9C900-063	63	10	150
2302615	I3A9C900-076	76	8	125
2302616	I3A9C900-102	102	7	100
2302617	I3A9C900-152	152	5	75


I8A9C900



Type DC - Female Dust Cap - Brass (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Hose ID mm	W.P bar	W.P psi
2302797	I8A9C900-019	19	17	250
2302798	I8A9C900-025	25	17	250
2302799	I8A9C900-032	32	17	250
2302800	I8A9C900-038	38	17	250
2302226	I8A9C900-051	51	17	250
2302801	I8A9C900-063	63	10	150
2302227	I8A9C900-076	76	8	125
2302802	I8A9C900-102	102	7	100


I5A9C700



Type DP - Male Dust Plug - Aluminium (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Coupling size mm	W.P bar	W.P psi
2301979	I5A9C700-019	19	17	250
2300967	I5A9C700-025	25	17	250
2302707	I5A9C700-032	32	17	250
2301982	I5A9C700-038	38	17	250
2301983	I5A9C700-051	51	17	250
2301985	I5A9C700-063	63	10	150
2301986	I5A9C700-076	76	8	125
2302708	I5A9C700-102	102	7	100
2302709	I5A9C700-127	127	5	75
2301988	I5A9C700-152	152	5	75

I3A9C700




Type DP - Male Dust Plug - Stainless Steel (A - A 59326D) Supersedes MIL C - 27.487

Item Code	Part Number	Coupling size mm	W.P bar	W.P psi
2302605	I3A9C700-019	19	17	250
2302606	I3A9C700-025	25	17	250
2302607	I3A9C700-032	32	17	250
2301746	I3A9C700-038	38	17	250
2302608	I3A9C700-051	51	17	250
2301989	I3A9C700-063	63	10	150
2301747	I3A9C700-076	76	8	125
2302609	I3A9C700-102	102	7	100
2302610	I3A9C700-152	152	5	75

CAMLOCK CAM and GROOVE


I8A9C700

Type DP - Male Dust Plug - Brass (A - A 59326D) Supersedes MIL C - 27.487



Item Code	Part Number	Coupling size mm	W.P bar	W.P psi
2302792	I8A9C700-019	19	17	250
2302793	I8A9C700-025	25	17	250
2302794	I8A9C700-032	32	17	250
2302795	I8A9C700-038	38	17	250
2302228	I8A9C700-051	51	17	250
2302229	I8A9C700-063	63	10	150
2302230	I8A9C700-076	76	8	125
2302231	I8A9C700-102	102	7	100


INJ09C



Gasket - Nitrile

Item Code	Part Number	Coupling size mm	Material
2303238	INJ09C-013	13	NBR
2301991	INJ09C-019	19	NBR
2300492	INJ09C-025	25	NBR
2300493	INJ09C-032	32	NBR
2302863	INJ09C-038	38	NBR
2301993	INJ09C-051	51	NBR
2302864	INJ09C-063	63	NBR
2301995	INJ09C-076	76	NBR
2301997	INJ09C-102	102	NBR
2302865	INJ09C-127	127	NBR
2301998	INJ09C-152	152	NBR


IJ09C



Gasket - Viton

Item Code	Part Number	Coupling size mm	Material
2305621	IJ09C-019	19	FKM
2300470	IJ09C-025	25	FKM
2306105	IJ09C-032	32	FKM
2303152	IJ09C-038	38	FKM
2303153	IJ09C-051	51	FKM
2303154	IJ09C-063	63	FKM
2303155	IJ09C-076	76	FKM
2303156	IJ09C-102	102	FKM


I8Y9C00



Handle, Ring & Pin - Brass

Item Code	Part Number	Coupling size mm	Handle	Pin / Ring
2303810	I8Y9C001	13 - 19	BRASS	PLATED STEEL
2303812	I8Y9C002	25	BRASS	PLATED STEEL
2303813	I8Y9C003	32 - 63	BRASS	PLATED STEEL
2303809	I8Y9C004	76 - 127	BRASS	PLATED STEEL
2303817	I8Y9C005	152	BRASS	PLATED STEEL

I3Y9C00



Handle, Ring & Pin - 304SS


Item Code	Part Number	Coupling size mm	Handle	Pin / Ring
2302672	I3Y9C001	13-19	304SS	304SS
2302673	I3Y9C002	25	304SS	304SS
2302232	I3Y9C003	32-63	304SS	304SS
2301677	I3Y9C004	76-127	304SS	304SS
2302674	I3Y9C005	152	304SS	304SS

CAMLOCK CAM and GROOVE

Crimping Ferrules

I207E

Interlocking Smooth Crimp Ferrules - Stainless Steel



Part Number	"Hose ID	Coupling size mm	Handle	Pin / Ring
I207E025-034036	25	34	36	STAINLESS 304
I207E025-036038	25	36	38	STAINLESS 304
I207E025-038040	25	38	40	STAINLESS 304
I207E032-042044	32	42	44	STAINLESS 304
I207E032-044046	32	44	46	STAINLESS 304
I207E038-047049	38	47	49	STAINLESS 304
I207E038-050052	38	50	52	STAINLESS 304
I207E038-052055	38	52	55	STAINLESS 304
I207E051-058063	51	60	63	STAINLESS 304
I207E051-063066	51	63	66	STAINLESS 304
I207E051-066069	51	66	69	STAINLESS 304
I207E051-072074	51	71	74	STAINLESS 304
I207E063-074077	63	74	77	STAINLESS 304
I207E063-076079	63	76	79	STAINLESS 304
I207E063-079082	63	79	82	STAINLESS 304
I207E076-086090	76	86	90	STAINLESS 304
I207E076-087091	76	87	91	STAINLESS 304
I207E076-092095	76	92	95	STAINLESS 304
I207E102-114117	102	114	117	STAINLESS 304
I207E102-116119	102	116	119	STAINLESS 304
I207E102-119122	102	119	122	STAINLESS 304
I207E152-165168	152	165	168	STAINLESS 304
I207E152-171174	152	171	174	STAINLESS 304

PRESSURE RATINGS FOR ALUMINIUM CAMLOCK CAM and GROOVE COUPLINGS

NOTE All pressures are based at 20°C and are offered as a guidance for Cam & Groove to Cam & Groove interface only. Incorrect coupling and gasket material compatibility with mediums being conveyed can reduce performance and result in failure.

Cam & Groove couplings are not suitable in compressed air and steam applications.

Size inch	Coupling size mm	W.P bar	W.P psi
3/4	19	17	250
1	25	17	250
1 1/4	32	17	250
1 1/2	38	17	250
2	51	17	250
2 1/2	63	10	150
3	76	8	125
4	102	7	100
5	127	5	75
6	152	5	75